



LED High Power In Ground Light 3W - P2

LED High Power In Ground Light 9W - P3

LED High Power In Ground Light 18W - P4


LED High Power In Ground Light 36W - P5

LED High Power In Ground Linear Light 3W / 6W- P6


LED High Power In Ground Linear Light 12W / 24W - P7

LED High Power In Ground Linear Light 7W / 18W - P8


LED High Power n Ground Linear Light 36W - P9




LED source	CREE or OSRAM			
LED QTY(PCS)	3Pcs			
Dimension(mm)	Ø100 x H120			
LED power(w)	1W			
Rate of power(w)	3w			
Range of voltage(v/Hz)	AC110-240V / DC24V			
Beam Angle	8° / 15° / 25° / 45° / 60°			
Color temperature/K	3000K	4000K	5000K	6500
	√	√	√	√
	2200K	2700K	RGB-FULL	DMX
	√	√	√	√
CRI (Ra>)	Ra≥80			
Lifespan	> 5000h			
Radiator	Die-cast aluminum / Electrostatic spraying			
Net weight(g)	0.62KG (For LED POWER DRIVER INSIDE)			
Dimmable	DMX			
Working environment	-30~50°C/10%~90% R.H			
Ingress Protection	IP67			




LED source	CREE or OSRAM			
LED QTY(PCS)	9Pcs			
Dimension(mm)	Ø160 x H155			
LED power(w)	1W			
Rate of power(w)	9w			
Range of voltage(v/Hz)	AC110-240V / DC24V			
Beam Angle	8° / 15° / 25° / 45° / 60°			
Color temperature/K	3000K	4000K	5000K	6500
	√	√	√	√
	2200K	2700K	RGB-FULL	DMX
	√	√	√	√
CRI (Ra>)	Ra≥80			
Lifespan	> 5000h			
Radiator	Die-cast aluminum / Electrostatic spraying			
Net weight(g)	1.7KG (For LED POWER DRIVER INSIDE)			
Dimmable	DMX			
Working environment	-30~50°C/10% ~ 90% R.H			
Ingress Protection	IP67			



LED source	CREE or OSRAM			
LED QTY(PCS)	18Pcs			
Dimension(mm)	Ø210 x H160			
LED power(w)	1W			
Rate of power(w)	18w			
Range of voltage(v/Hz)	AC110-240V / DC24V			
Beam Angle	8° / 15° / 25° / 45° / 60°			
Color temperature/K	3000K	4000K	5000K	6500
	√	√	√	√
	2200K	2700K	RGB-FULL	DMX
	√	√	√	√
CRI (Ra>)	Ra≥80			
Lifespan	> 5000h			
Radiator	Die-cast aluminum / Electrostatic spraying			
Net weight(g)	2.7KG (For LED POWER DRIVER INSIDE)			
Dimmable	DMX			
Working environment	-30~50°C/10% ~ 90% R.H			
Ingress Protection	IP67			




LED source	CREE or OSRAM			
LED QTY(PCS)	36Pcs			
Dimension(mm)	Ø260 x H155			
LED power(w)	1W			
Rate of power(w)	36w			
Range of voltage(v/Hz)	AC110-240V / DC24V			
Beam Angle	8° / 15° / 25° / 45° / 60°			
Color temperature/K	3000K	4000K	5000K	6500
	√	√	√	√
	2200K	2700K	RGB-FULL	DMX
	√	√	√	√
CRI (Ra>)	Ra≥80			
Lifespan	> 5000h			
Radiator	Die-cast aluminum / Electrostatic spraying			
Net weight(g)	4.3KG (For LED POWER DRIVER INSIDE)			
Dimmable	DMX			
Working environment	-30~50°C/10% ~ 90% R.H			
Ingress Protection	IP67			

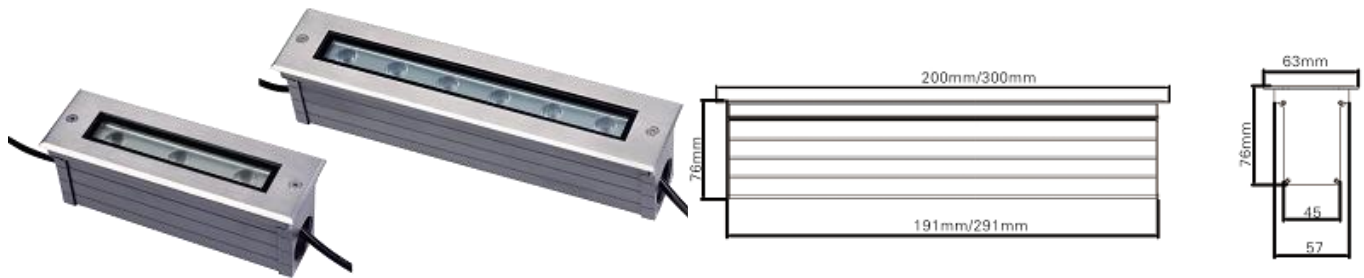


LED source	CREE or OSRAM			
LED QTY(PCS)	3Pcs / 6Pcs			
Dimension(mm)	L200 x W63 x H76 / L300 x W63 x H76			
LED power(w)	1W			
Rate of power(w)	3w / 6w			
Range of voltage(v/Hz)	DC24V			
Beam Angle	8° / 15° / 25° / 45° / 60°			
Color temperature/K	3000K	4000K	5000K	6500
	√	√	√	√
	2200K	2700K	RGB-FULL	DMX
	√	√	√	X
CRI (Ra>)	Ra≥80			
Lifespan	> 5000h			
Radiator	Die-cast aluminum / Electrostatic spraying			
Net weight(g)	0.8KG / 1.2KG			
Dimmable	Non-dimmable			
Working environment	-30~50°C/10% ~ 90% R.H			
Ingress Protection	IP67			



LED source	CREE or OSRAM			
LED QTY(PCS)	12Pcs / 24Pcs			
Dimension(mm)	L500 x W63 x H76 / L1000 x W63 x H76			
LED power(w)	1W			
Rate of power(w)	12w / 24w			
Range of voltage(v/Hz)	DC24V			
Beam Angle	8° / 15° / 25° / 45° / 60°			
Color temperature/K	3000K	4000K	5000K	6500
	√	√	√	√
	2200K	2700K	RGB-FULL	DMX
	√	√	√	X
CRI (Ra>)	Ra≥80			
Lifespan	> 5000h			
Radiator	Die-cast aluminum / Electrostatic spraying			
Net weight(g)	1.8KG / 3.6KG			
Dimmable	Non-dimmable			
Working environment	-30~50°C/10% ~ 90% R.H			
Ingress Protection	IP67			

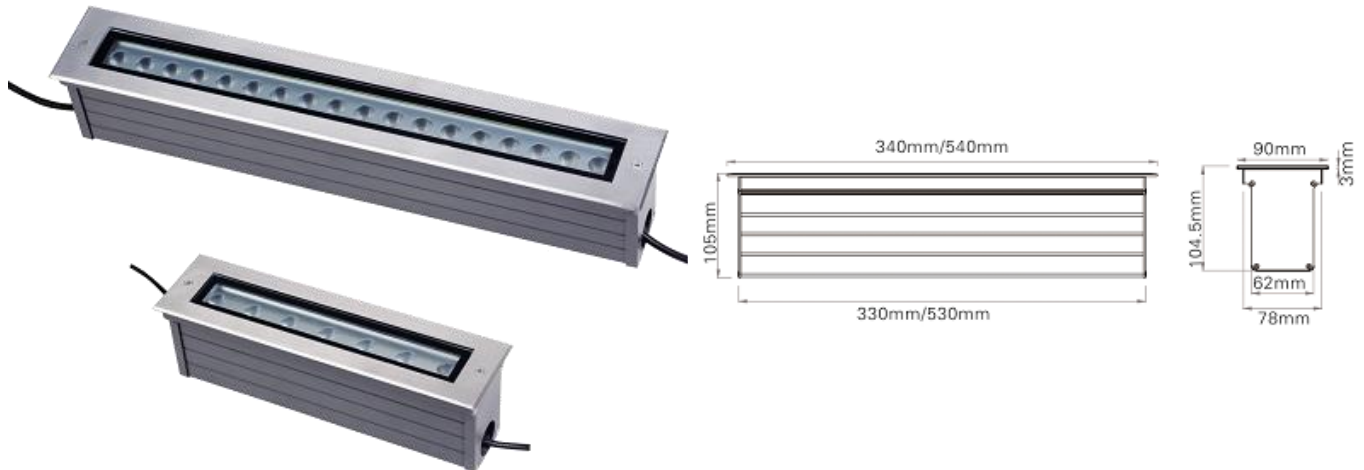

LED source	CREE or OSRAM			
LED QTY(PCS)	7Pcs / 18Pcs			
Dimension(mm)	L540 x W90 x H104.5 / L340 x W90 x H104.5			
LED power(w)	1W			
Rate of power(w)	7w / 18w			
Range of voltage(v/Hz)	DC24V			
Beam Angle	8° / 15° / 25° / 45° / 60°			
Color temperature/K	3000K	4000K	5000K	6500
	√	√	√	√
	2200K	2700K	RGB-FULL	DMX
	√	√	√	X
CRI (Ra>)	Ra≥80			
Lifespan	> 5000h			
Radiator	Stretched aluminum housing / Electrostatic spraying			
Net weight(g)	1.9KG / 3KG			
Dimmable	Non-dimmable			
Working environment	-30~50°C/10% ~ 90% R.H			
Ingress Protection	IP67			

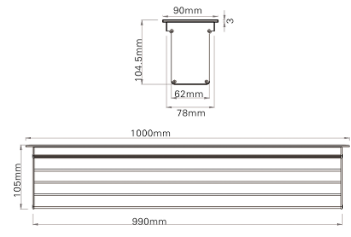

LED source	CREE or OSRAM			
LED QTY(PCS)	36Pcs			
Dimension(mm)	L1000 x W90 x H104.5			
LED power(w)	1W			
Rate of power(w)	36w			
Range of voltage(v/Hz)	DC24V			
Beam Angle	25° / 45° / 60°			
Color temperature/K	3000K	4000K	5000K	6500
	√	√	√	√
	2200K	2700K	RGB-FULL	DMX
	√	√	√	√
CRI (Ra>)	Ra≥80			
Lifespan	> 5000h			
Radiator	Stretched aluminum housing / Electrostatic spraying			
Net weight(g)	5.2KG			
Dimmable	Non-dimmable			
Working environment	-30~50°C/10% ~ 90% R.H			
Ingress Protection	IP67			